



## THE TRIAL STUDY ABOUT THE MICRO POWER GENERATION BY USE OF VORTEX INDUCED VIBRATION

Yoshifumi YOKOI<sup>1</sup>

<sup>1</sup>*Department of Mechanical Engineering, Faculty of Engineering, National Defense Academy of Japan*

### **Abstract**

*In order to construct a micro power generation system using a piezo-electric element, power generation was tried using excitation oscillation of the bluff cylinder by the vortex shedding from the bluff cylinder. The bluff cylinder consists of a board spring section in which the piezo-electric element was attached, and a body section. The bluff cylinder was inserted into the water flow, the shape and the submersion depth of the bluff cylinder, and the flow velocity were varied, and the power generation characteristic was investigated. As a result, it was found that it can generate electricity by vortex excitation. It was found that the length and the submersion depth of the body section influence power generation. It was shown that the power generation characteristic changes with cross-sectional shape of the bluff cylinder.*

**Key words:** *vortex; flow induced vibration; cylinder; piezo-electric element.*

### **INTRODUCTION**

Considering an energy problem in recent years, it is interesting to exploit effectively the hydraulic power energy of the small scale and medium scale which is not yet used. As the example, the development and utilization in a river, an irrigation canal, etc. of low drop micro hydropower generation are performed actively. Those trends were reported by Turbomachinery Society of Japan (Turbomachinery Society of Japan ed. 2002a, 2002b). In realization of the plan, there are many matters which cannot be suitable by extension of the technique developed in the large-scale water-power generation of the concentration of all aspect of a society in one place. Therefore, development of new power generation technique or some method is needed. In response to such background, the power generation method using the self oscillation (vortex excitation) by the vortex shedding from the bluff cylinder placed into the flow is proposed by Bemitsas et al. (2008), Uno & Kawashima (2010), Koide et al. (2011) and Hiejima et al. (2013). In order not to have a rotation mechanism the merit of vortex excitation type power generation is a maintenance-free. And the assembly and installation are also easy. Furthermore, since there is no impeller, power generation is possible, without damaging the living thing which lives in water by rotation of the impeller.

In this study, the piezo-electric element was used for the power generation element, and power generation was tried using excitation oscillation of the bluff cylinder by the vortex shedding from the bluff cylinder. Design manufacture of the power generation bluff cylinder was performed. And some tests were performed by the power generation bluff cylinder which was inserted into the water flow. In such tests, the shape and the submersion depth of the submersion section, and the flow velocity were varied, and the power generation characteristic was investigated.

### **EXPERIMENTAL APPARATUS AND METHOD**

Experimental apparatus consists of a closed circuit water channel, a test bluff cylinder-traverse apparatus, and an oscillating frequency measuring device. The closed circuit water channel is the apparatus (water capacity 4 m<sup>3</sup>) used by the previous report (Yokoi, 2016). The sizes of the test section were 2 m in length, 800 mm in width, and 430 mm in depth, the flow velocity range was 0 - 1.2 m/s, and the turbulence to the average flow velocity was less than  $\pm 1.5$  %. The test bluff cylinder-traverse apparatus is 2 axis dial slight movement type, and those moving ranges are 72 mm and 64 mm, respectively. Those directions of moving are the depth direction and the width direction. As for the oscillation frequency measuring device, the storage oscilloscope (KENWOOD, DCS-7020) was used.

The schematic drawing of the test bluff cylinder (oscillating pendulum) is shown in Fig.1. The test bluff cylinder consists of a spring section (upper part) and a body section (lower part). The spring is a board with a length of 70 mm, a width of 16 mm, and a thickness of 2 mm made from vinyl chloride.




As for the body, the circular cylinder, the triangular cylinder, and the square cylinder were prepared. Figure 2 shows the shape of those cylinders. The length of circular cylinder is two kinds, 250 mm and 500 mm, and the diameter is 16 mm. The length of a triangular cylinder and a square cylinder is 250 mm, and those side lengths are 15 mm.


The power generation object was set in the section of the board spring. The used power generation objects were shown in Fig. 3. One of which is a piezo-electric sensor (Tokyo sensor company, DT1-028 K/L) and the other is a piezo-electric buzzer (SPL company, PT08-Z185). These two kinds of power generation objects are made by different material and the manufacture method.

Experiment parameters are the length of bluff cylinder, the submersion depth of the body (draft), its setting posture, and water flow velocity. The submersion depth of the body is three kinds (70, 140 and 210 mm). The posture of a triangular cylinder and a square cylinder is in the state where the angle was directed to the flow, and the state which directed the plane. The water flow velocity was varied to 44 steps in the range of 0 - 1.2 m/s.


The experiment procedure is the following. The power generation object is set in the board spring section of the test bluff cylinder, and the test bluff cylinder is attached in the traverse apparatus. The direction is decided to oscillate right-angled to the flow in the case of the attachment. The body is sunk in the target submersion depth. An aspect that it was set based on the procedure is shown in Fig. 4. The target flow velocity is caused by inverter operation of the pump of the closed circuit water channel. The voltage variation waveform from the power generation object sensor is observed with the storage oscilloscope, and output voltage and frequency are measured. Here, the frequency measured the signal of voltage waveform, observed the time jitter with the storage oscilloscope, and determined for fluctuation frequency.

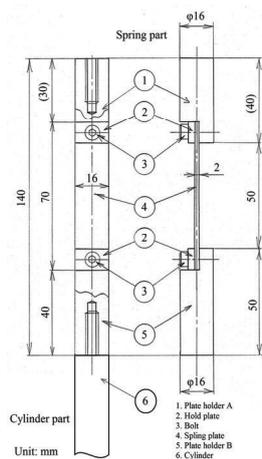


**Fig. 1** The schematic drawing of a test cylinder spring section

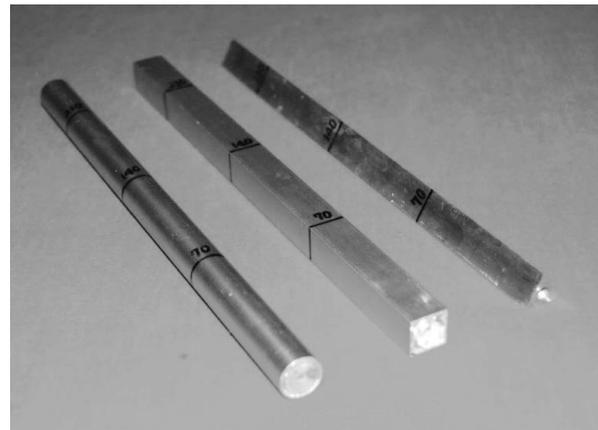

**Fig. 2** Body section shape of the test cylinder (circular cylinder, square cylinder, and triangular cylinder)

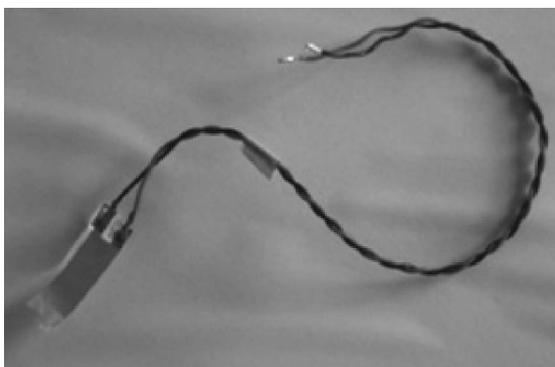


(a)

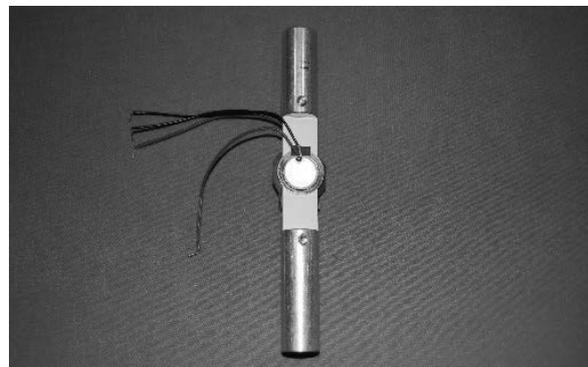

(b)

**Fig. 3** The aspect of the power generation object, (a) piezo-electric sensor, (b) piezo-electric buzzer

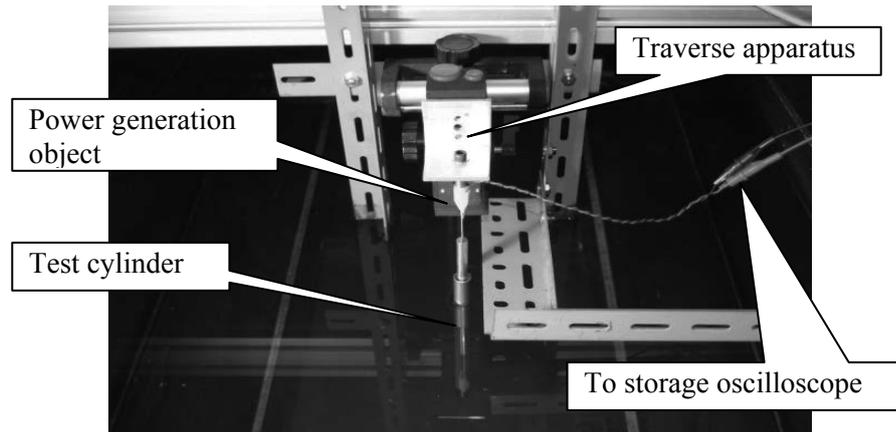

**Fig. 4** The photograph of the situation where the test cylinder was set in the traverse apparatus

**Tab. 1** Synthetic character frequency of the test cylinder

Situation (mm)		Cylinder shape (Hz)				
span	draft	C.C.	S.S.	F.S.	S.T.	F.T.
250	70	2.5	2.0	1.9	2	2.2
	140	2.2	1.7	1.7	1.9	2
	210	2.1	1.6	1.6	1.9	
500	205	0.9				
	380	0.8				

## EXPERIMENTAL RESULTS AND DISCUSSION

The result of having measured the characteristic vibration of the overall system of the test bluff cylinder with a board spring is shown in Tab. 1. The meaning of the symbols used in the table are the following. The symbol "C.C." is a circular cylinder, the symbol "S.S." is the square cylinder which directed the angle to the flow, the symbol "F.S." is the square cylinder which directed the plane to the flow, the symbol "S.T." is the triangular cylinder which directed the angle to the flow, and the symbol "F.T." is the triangular cylinder which directed the plane to the flow. When the submersion depth of the body (draft) became shallow, it was confirmed that the character frequency as the overall system tends to become high.

Since the piezo-electric element reacts to unsteady stress, it can generate electricity by the lift alternately produced by the Karman vortex. An example of the power generation voltage waveform is shown in Fig. 5. In the beam which generally has a uniform section, if amplitude becomes large near critical oscillation frequency and it passes over it, it is known that amplitude will become small. If the vortex excitation based on the Karman vortex shedding also makes the flow velocity increase from a halt condition, vortex shedding frequency also increases, and the bluff cylinder begins to oscillate based on critical oscillation frequency, and obtains a soon large amplitude point. Moreover, amplitude will become small if it passes over this point, and it is predicted that oscillation ceases. Figure 6 shows the relationship between the flow velocity and the produced voltage. An abscissa is the average flow velocity in the test section of the closed circuit water channel, and the ordinate is the average value of the peak-to-peak voltage observed by the oscilloscope waveform. In the case of the circular cylinder (C.C.) and the sharp square cylinder (S.S.), the number of peaks is one and after the peak with the increase in the flow velocity, the voltage shows a gently-sloping reduction. On the other hand, in the case of a flat triangular cylinder (F.T.) and a flat square cylinder (F.S.), there is no particular peak and the tendency which the voltage produced to the increase in the flow velocity is increasing is seen. In the case of a sharp triangular cylinder (S.T.), there was no response to the increase in the flow velocity. In the case of a circular cylinder and a sharp square cylinder, one peak with wide width can see. Since



voltage is obtained even if the flow velocity changes, the peak with wide width is a thing desirable in use. Since the voltage of 500mV or more is obtained in the range of the flow velocity 0.22 - 0.38 m/s, considering this matter, as for the circular cylinder body and the sharp square body, it turns out that it is in the setting situation of having been most suitable for the use. The Karman vortex is not generated behind the flat triangular cylinder and the flat square cylinder. The motion of body is carrying out large oscillation to the flow and the perpendicular direction very slowly. The difference of water level occurred in the body upstream and body down stream side, and a cavity was made behind the body. The aspect of the motion and cavernous generation are shown in Fig. 7. The experimental result when using a piezo-electric buzzer as the power generation object is shown in Fig. 8. In this experiment, using the circular cylinder with length of 250 mm, the submersion depth of the body was set to 70, 140, 210 mm, and water flow velocity was varied to 44 steps in the range of 0 - 1.2 m/s. Even when it changes into the piezo-electric buzzer, the power generation characteristic does not change, but since a case with a submersion depth of 140 mm of the body has wide peak width, it is thought that it is most suitable for the use. Figure 9 shows and compares the power generation voltage characteristic of two kinds of power generation objects (piezo-electric sensor and piezo-electric buzzer). Here, the circular cylinder of 250 mm length with submersion depth of 140 mm is used. In any case, the peak of power generation voltage is shown at the flow velocity range of 0.22 - 0.38 m/s. However, the clear difference is shown among both. It is shown that the voltage which a piezo-electric buzzer produces is about 4 times the voltage which a piezo-electric sensor produces. Since there is a difference on manufacture in the used product of two piezo-electric elements, it is guessed that such a result was obtained. It was found that it is important to choose the piezo-electric element corresponding to the purpose.

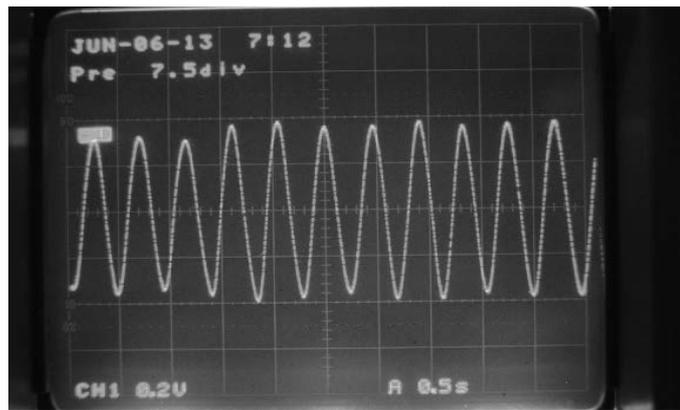


Fig. 5 An example of the output waveform from the power generation object



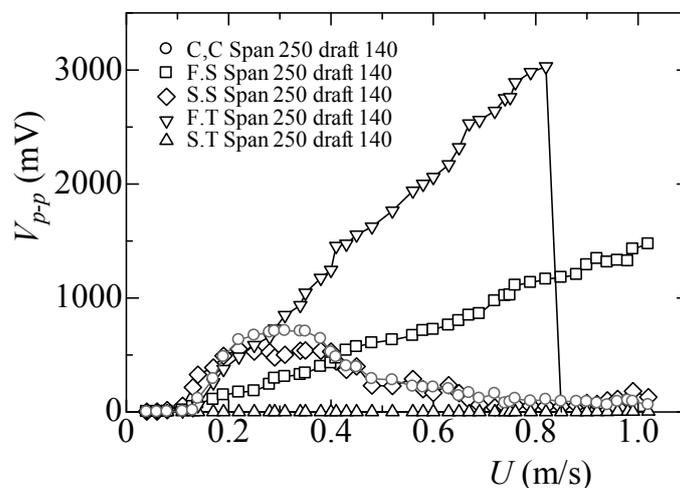



Fig. 6 Relationship between flow velocity and output voltage, in the case of circular cylinder

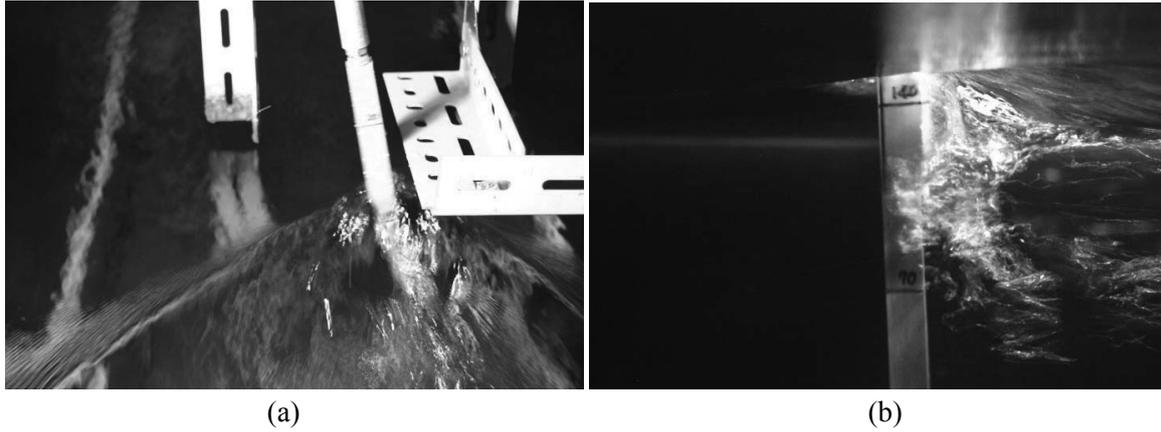

**Fig. 7** The behavior of the plane square cylinder, and the aspect of flow; the span of the square cylinder was 250 mm, and the submersion depth was 150 mm, (a) the photograph seen from the down stream side, (b) the underwater photograph seen from the width side

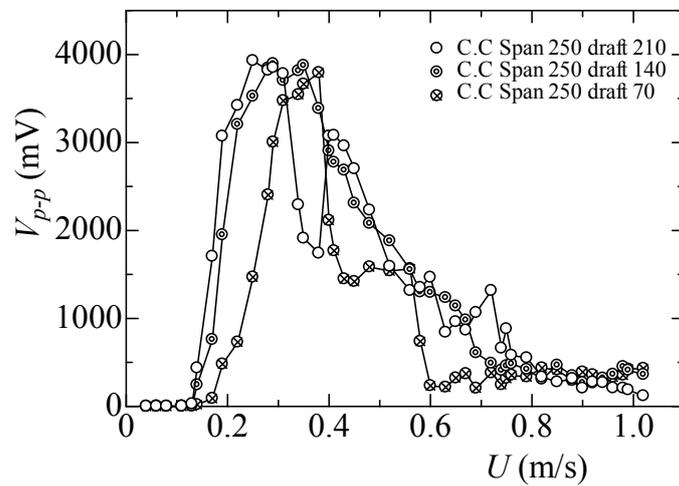

**Fig. 8** Relationship between flow velocity and output voltage, in the case of sharp square cylinder

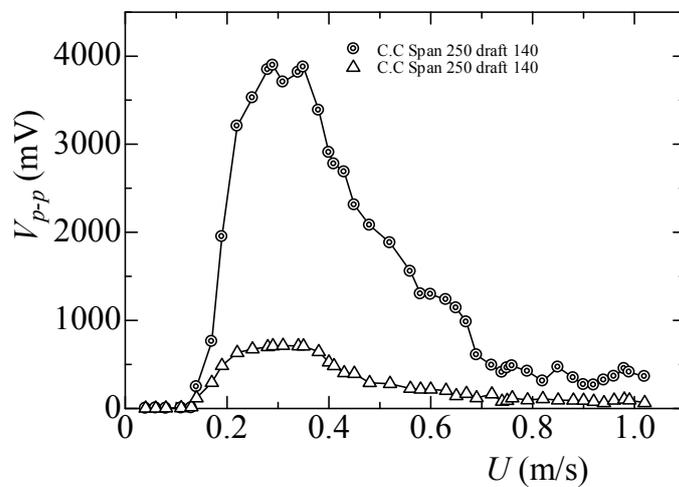

**Fig. 9** Relationship between flow velocity and output voltage, in the case of flat square cylinder



## CONCLUSIONS

The following conclusions were obtained as a result of performing the characteristic test of the bluff cylinder pendulum aiming at generating electricity by vortex excitation.

- (1) Generating of voltage was accepted by vortex excitation through the piezo-electric element.
- (2) The length and the submersion depth of bluff cylinder influence the movement of the oscillating pendulum.
- (3) The magnitude and its peak width of the voltage produced by vortex excitation corresponding to the flow velocity are changed by cross-sectional shape of the body section.
- (4) It is important to choose the power generation object which suited the use purpose.

## ACKNOWLEDGMENT

Author is thankful to Mr. Jalernsk Kamon, Mr. Srisuntornsiri Rungsak and Mr. Kouichirou Ooue who helped this work and who are the student staff of my laboratory.

## REFERENCES

1. Bemitsas, M. M., Raghavan, K., Ben-Simon, Y., & Garcia, E. M. H. (2008). VIVACE (Vortex Induced Vibration Aquatic Clean Energy): A New Concept in Generation of Clean and Renewable Energy From Fluid Flow. *Journal of Offshore Mechanics and Arctic Engineering*, 130, 041101.
2. Hiejima, S., Oka, K., Hayashi, K., & Inoue, H. (2013). Fundamental Experiment for Energy Harvesting from Flow-Induced Vibration of Inverted Pendulum. *Annual Journal of Civil Engineering in the Ocean*, 69(1), 12-21. (in Japanese)
3. Koide, M., Sekizaki, T., Yamada, S., Takahashi, T., & Shirakashi, M. (2011). Prospect of Micro Power Generation Utilizing VIV in Small Stream Based on Verification Experiments of Power Generation in Water Tunnel. *Transactions of the Japan Society of Mechanical Engineers*, 77(775), 702-714. (in Japanese)
4. Turbomachinery Society of Japan ed. (2002a). Special Issue: Application Technology of Micr-Hydropower 1. *Turbomachinery*, 30(3), 129-160. (in Japanese)
5. Turbomachinery Society of Japan ed. (2002b). Special Issue: Application Technology of Micr-Hydropower 2. *Turbomachinery*, 30(4), 193-253. (in Japanese)
6. Uno, M. & Kawashima, R. (2010), The New Micro Water Power Generation by Use of the Oscillating Bluff Body. *Turbomachinery*, 38(2), 121-125. (in Japanese)
7. Yokoi, Y. (2016). A Study about the Design and Development of the Water Flow Experimental Facilities for the Study of Flow Induced Vibration Phenomenon, In 57th International Conference of Machine Design Departments (ICMD2016)(pp.175-180).

### Corresponding author:

Prof. Yoshifumi Yokoi, Department of Mechanical Engineering, Faculty of Engineering, National Defense Academy of Japan, 1-10-20 Hashirimizu, Yokosuka, Kanagawa, Japan 239-8686, phone: +81468413810, e-mail: yokoi@nda.ac.jp